



EQUIPMENT



TOOLS

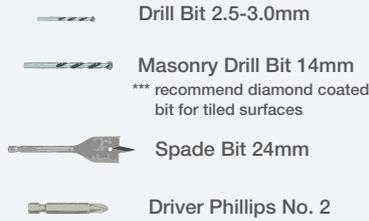


IMPORTANT INFORMATION

- ⚠ 1. Product contains a powerful magnet. Avoid contact with metal foreign bodies prior to installation. Keep well clear of electronics and electrical equipment.
 - 2. Carefully read installation Instructions prior to installation. Installing contrary to these instructions risks damage to your floors and door
- Carpeted surfaces: Allow sufficient clearance of carpet thread and pile when drilling hole into floor to avoid wrapping or binding to drill bit
- Tiled surfaces: It is recommended to use a diamond coated drill bit to avoid chipping and damage of tiles

BARN-DOOR INSTALLATION INSTRUCTIONS

A




* Trade packaging shown

1. Remove top section only of packaging* Leave magnet in packaging for now

2. Select:



B

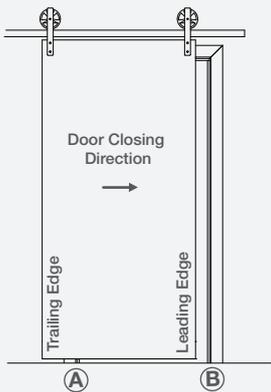


Determine location for Door Stop

The Fantom Barn Door Stop can be fitted near the Leading edge (A), or Trailing Edge (B) of the Door when closed.

Position A is more concealed than B, but may be a little harder to get to if requiring cleaning.

Decide your preference


C



Drill Hole for Magnet

1. Remove door
2. Measure 70mm (2 3/4") from preferred end of door (determined at Step B)
3. Mark centre line for drill location in centre of door thickness
4. Drill diameter 24mm (15/16") hole with spade bit, 25mm (1") deep


D



Drill pilot hole for Striker Screws

1. Using the Striker as a template, or the template overleaf, position centre of Striker into Magnet Hole
2. Drill 2 x 3mm diameter holes, 20mm (13/16") deep

E

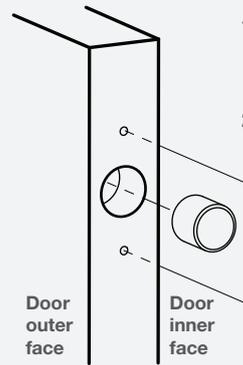

Fit Magnet and Striker Plate

1. Carefully unwrap Magnet from packaging

⚠ Warning. Powerful magnet, avoid any steel object within at least 200mm (8")


2. Place by hand immediately into hole

3. Fit Striker

⚠ Deep edge of Striker MUST be positioned toward Trailing Edge of Door!!!
If fitted in reverse, door stop will not function and damage may occur !!


4. Tighten Striker Screws

F




Mark Pin location on ground

1. Re-hang Door, and move to desired 'closed position'
2. Transfer centre line of Striker Plate onto ground and mark outside face of door
3. Remove door and mark Pin Centre, ensuring it is centred to the door thickness, and centred to the Striker

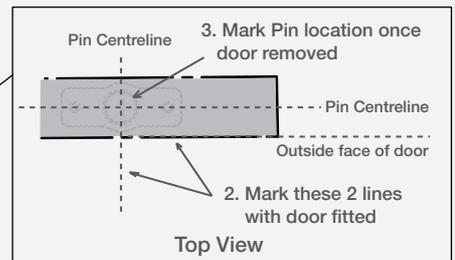

G

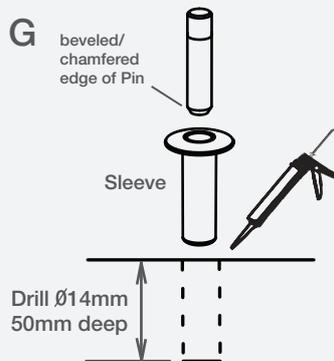

Install Pin into floor

1. Drill 14mm (9/16") hole, 50mm (2") deep.
2. Trial fit Sleeve into hole and ensure it is a loose fit. Redrill if required
3. Clean hole and area
4. Apply silicone to Sleeve and insert into hole
5. Once dry, drop pin into Sleeve, chamfered edge first

H



Rehang Door

1. Correctly refit door
2. Test by opening and closing door. Door should stop as desired and release with a light pull to open door